


# Platform

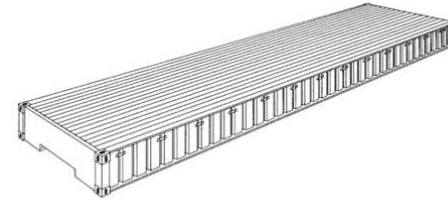

# 20'/40'

1' 1<sup>1</sup>/<sub>4</sub>" HIGH  
2' HIGH

Construction	Dimensions			Weights		
	Length	Width	Height of Bottom	Max. Gross	Tare	Max. Payload
<b>1ft 1<sup>1</sup>/<sub>4</sub> high</b>						
<b>Steel container with softwood floor</b>	6,058mm 20ft	2,438mm 8ft	335mm 1ft 1 <sup>1</sup> / <sub>4</sub>	24,000kg 52,910lbs	2,100kg 4,630lbs	21,900kg 48,280lbs
<b>Steel container with collapsible flushfolding endwalls – can be converted to a platform</b>	6,058mm 20ft	2,438mm 8ft	370mm 1ft 2 <sup>9</sup> / <sub>16</sub>	30,480kg 67,200lbs	2,520kg 5,560lbs	27,960kg 61,640lbs
	6,058mm 20ft	2,438mm 8ft	370mm 1ft 2 <sup>9</sup> / <sub>16</sub>	30,400kg 74,950lbs	2,740kg 6,040lbs	31,260kg 68,910lbs
<b>2ft high</b>						
<b>Steelframe with softwood floor</b>	12,192mm 40ft	2,438mm 8ft	610mm 2ft	45,000kg 99,210lbs	4,200kg 9,260lbs	40,800kg 89,950lbs
<b>Steel container with collapsible flushfolding endwalls – can be converted to a platform</b>	12,192mm 40ft	2,173mm 7ft 1 <sup>1</sup> / <sub>2</sub>	647mm 2ft 1 <sup>1</sup> / <sub>2</sub>	45,000kg 99,210lbs	5,800kg 12,800lbs	39,200kg 86,410lbs
	12,192mm 40ft	2,245mm 7ft 4 <sup>3</sup> / <sub>8</sub>	648mm 2ft 1 <sup>1</sup> / <sub>2</sub>	45,000kg 99,210lbs	5,700kg 12,570lbs	39,300kg 86,640lbs